





Model -DF140W1 : D Type LyTec Fiber (WHITE) D 型麗特冷光綫 (白色)

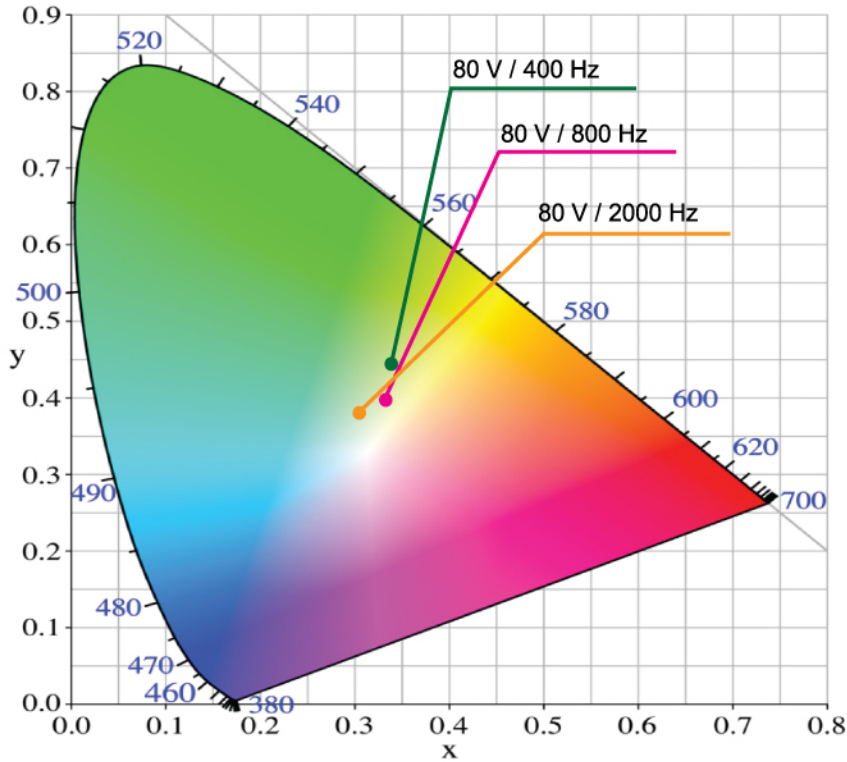

Typical Chromaticity Coordinates 冷光綫色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
80V / 400Hz	0.344	0.448
80V / 800Hz	0.335	0.427
80V / 2000Hz	0.318	0.377

Fiber Spectrum at 80V/2000Hz 冷光綫光譜在 80伏/2000赫茲

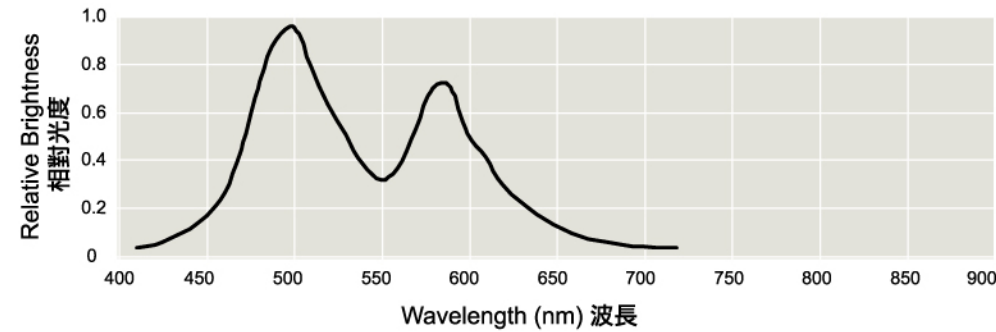

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

V, 伏	200Hz	400Hz	800Hz	2000Hz	4000Hz
40V	-	5.7	9.1	14.2	20.0
50V	-	11.3	18.0	29.2	39.9
60V	-	18.5	29.7	48.4	66.4
70V	-	27.0	43.4	70.7	96.1
80V	-	36.5	59.0	96.1	132.5

Typical Initial Reference Brightness 冷光綫始光度參考值

