





# Model -TF232R1 : T Type LyTec Fiber (RED) T 型麗特冷光綫 (紅色)

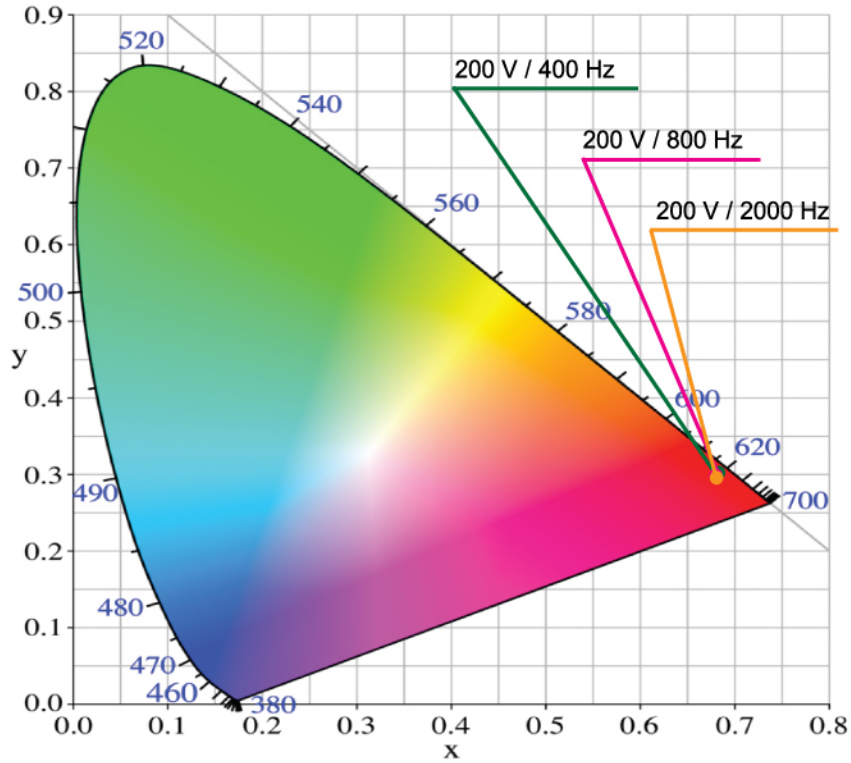

Typical Chromaticity Coordinates 冷光綫色度坐標

Voltage 電壓 Frequency 電頻	Chromaticity Coordinates 色度坐標	
	X	Y
200V / 400Hz	0.686	0.312
200V / 800Hz	0.687	0.311
200V / 2000Hz	0.687	0.311

Fiber Spectrum at 200V/2000Hz 冷光綫光譜在 200伏/2000赫茲

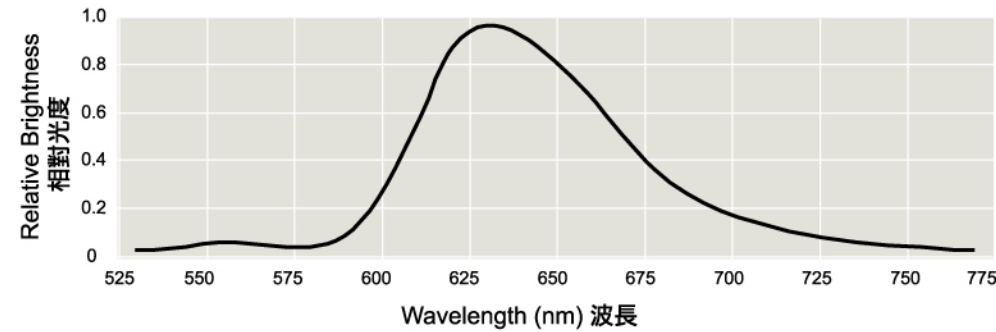

Typical Initial Reference Brightness (nit) 冷光綫始光度參考值

V, 伏	400Hz	800Hz	1200Hz	1600Hz	2000Hz
40V	-	-	-	-	-
80V	4.5	8.5	10.5	13.0	15.0
120V	11.5	21.5	28.0	35.0	41.0
160V	21.5	36.5	49.5	59.5	67.0
200V	31.0	53.5	72.5	87.5	101.0

Typical Initial Reference Brightness 冷光綫始光度參考值

